

Rec'd PCT/PTO 10 FEB 2003

PCT/GB 2003 / 0 0 3 5 0 5



10/524255



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8BQ

16 SEP 2003

WIPO

PCT

## PRIORITY DOCUMENT


SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

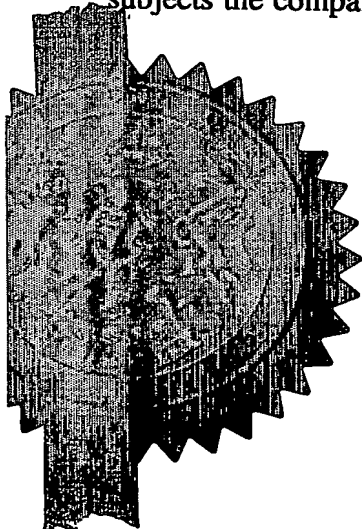

Signed

*Stephen Hordley*


Dated

1 September 2003

**BEST AVAILABLE COPY**

Patents Form 1/77

Patents Act 1977  
(Rule 16)

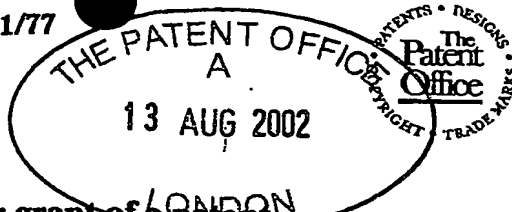

14AUG02 E740712-1 D00001  
P01/7700 0.00-0218801.9

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference 8683 GB AJ5

2. 1 0218801.9 13 AUG 2002

3. Full name, address and postcode of each applicant (*underline all surnames*)  
if Shield Medicare Limited  
2 Ynyscedwyn Enterprise Park  
Trawsfordd Road  
Ystradgynlais SA9 1DT  
United Kingdom

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

7512916002

4. Title of the invention Spray Dispenser Assembly and Vessel Therefor

5. Name of your agent (*if you have one*) Abel & Imray  
"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)  
20 Red Lion Street  
London  
WC1R 4PQ  
United Kingdom

Patents ADP number (*if you know it*) 174001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country	Priority application number ( <i>if you know it</i> )	Date of filing (day / month / year)
---------	----------------------------------------------------------	----------------------------------------

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
-------------------------------	----------------------------------------

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if*  
a) *any applicant named in part 3 is not an inventor, or*  
b) *there is an inventor who is not named as an applicant, or*  
c) *any named applicant is a corporate body.*  
See note (d))

Yes

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 0

Description 14

Claim(s) 7

Abstract 0

Drawing(s) 3 + 3

CF

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Abel + Imray  
Abel & Imray

Date

12/08/02

12. Name and daytime telephone number of person to contact in the United Kingdom

Amanda Stark - 029 2034 7030

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

Spray Dispenser Assembly and Vessel Therefor

The present invention relates to spray dispenser assemblies and vessels therefor and in particular to those suitable for use in spray dispensing sterile or reactive liquids.

Aerosol or spray dispensers are commonly used for dispensing sprayed sterile or reactive fluids in "clean room" environments such as hospitals, pharmaceutical preparation areas and food preparation areas.

Many liquid spray dispensers use an aerosol cartridge to provide compressed gas for atomising the liquid product and driving it out through the nozzle. However, it is now apparent that certain of the gases most often used in spray cartridges, such as fluorocarbons, are highly toxic and harmful to the environment.

Spray dispensers fitted with manual trigger sprays are well known. In such a dispenser a liquid spray bottle is fitted with a spray pump which has a spray nozzle at the mouth of a liquid container. When the spray pump is operated, the liquid is drawn up to the spray nozzle through a suction pipe which is inserted within the liquid container and sprayed out through to spray nozzle. For this arrangement to work the spray bottle must be open to the outside atmosphere for the purpose of drawing outside air into the container when the spray pump is operated to

spray out the liquid. This mechanism of action is unacceptable for sterile liquids and in a clean room environment as the liquid in the container may be contaminated by particles, including bacteria, present in the air.

Our previous patent application published as GB 2 333 129 A (herein incorporated in full by reference) describes a spray dispenser with collapsible bag, which attempted to overcome problems in the prior art. These type of dispensers will hereinafter be termed "bag in bottle dispensers". The bag described is in sealing engagement with the trigger pump, and air is prevented from flowing into the bag. The bag collapses as liquid is dispensed. To allow the pump to function correctly a vent is provided from the extraction means, but this is external of the bag to prevent contamination of liquid contained therein.

Continued testing of the dispenser described in GB 2 333 129 A shows that the assembly has a problem with leakage. Studies of the prior art device show that leakage is caused by a poor seal provided between the bag, the bung, the support means and the cap of the support means. Improvements to the bag used overcome this problem.

Accordingly the present invention provides in a first aspect a collapsible liquid impermeable vessel for use in a spray dispenser assembly,

the vessel having an open end comprising a neck portion provided with a collar that is more rigid than the vessel;

the collar being adapted to sealingly engage with seal means provided between the extraction means of the spray dispenser assembly and the vessel.

By providing an at least semi-rigid collar on the vessel, the sealing means may engage directly with the vessel, providing a more complete seal than in the prior art, which relied on a seal between the bung, bag, support neck and cap. This improvement has been shown to provide a substantially stronger seal and lower the amount of leakage to a negligible level.

The collar may be formed separately from the neck and joined thereto around the collar circumference. Preferably the collar is inserted into the neck of the vessel and welded around the collar circumference, preferably completely around the collar circumference.

By providing the collar inside the neck of the vessel, with the seal provided between the inside face of the collar and the seal means, any leakage between the join of the collar to the neck is provided external to the vessel and away from the extraction means. As the vessel is intended for use within a support means, any leakage from the neck to collar join will fall within the support means.

In the prior art device, as the bag was folded over the neck of the support vessel, any leakage from the bag and the seal means could flow onto the exterior of the support means and possibly into contact with the hands of a

5 user. This could be particularly dangerous if the liquid contained within the dispenser was of a hazardous nature.

Generally the bags used in the collapsible bag in bottle dispensers are made from two sheets of plastics material welded together at their edges to form a  
10 substantially cylindrical vessel providing a neck end with an open neck portion disposed at one end thereof and a closed end opposite the neck end. According to the present invention a collar is disposed in the open neck portion.

According to a preferred embodiment of the present  
15 invention leakage has been shown to be reduced further by trimming the neck portion of the welded vessel before welding the collar in the neck of the vessel. This prevents any excess material on the neck from pinching around the collar, thus potentially forming conduits for  
20 liquid to leak through.

The weld between the neck and the collar is preferably  
5 mm wide.

In a preferred embodiment the closed end of the vessel, opposite the neck end, is substantially curved.

This provides for less stress points on the vessel than if the closed end were flat.

The neck portion may be disposed in the centre of the neck end of the vessel or may be offset to one side of the neck end of the vessel, in which case it is preferred to provide additional strengthening around the neck end of the vessel.

The collar is preferably annular and is adapted to sealingly engage with annular sealing means.

10 Advantageously the collar is substantially tapered so that pushing seal means into the collar provides a progressively greater seal.

According to a preferred embodiment the collar has an annular lip adapted to rest upon the neck of a support means.

15 Such collar locates the vessel on the support means and is capable of holding the vessel in position with regard to the support means when the support means is provided with a cap or lid.

The vessel preferably comprises flexible sheet or membrane material and generally provides a flaccid bag or pouch which may be incapable of self support. Preferably the vessel comprises a di- or tri- lumen bag.

20

Depending on the envisaged contents of the vessel the material from which it is made may be very important. It is preferred that the vessel comprises plastics material

25



which is inert, even upon gamma irradiation or contact with biocides or other liquids that it may be used to contain.

The material used is preferably elastic so that the vessel may be inflated to many times its original size and is

5 preferably resistant to degradation at high temperature.

The collar of the vessel may also comprise plastics material although this is thicker than that used for the vessel itself.

The collar and the vessel are preferably made from the  
10 same material, which is generally formed from granulated or particulate material which is blow moulded to form the collar and bag. Producing the bag and collar from the same material has the advantage of ensuring the integrity of the weld as it is easier to weld components of the same  
15 material.

The vessel according to the present invention may be provided with seal means in sealing engagement with the collar thereof.

The seal means preferably comprises a seal element  
20 (such as a stopper, plug or bung) arranged to sealingly engage with the liquid impermeable container proximate the open end thereof so as to seal the collapsible liquid impermeable container. The seal means preferably comprises resiliently flexible material such as rubber or the like.

25 The seal means may comprise material which is capable

of being irradiated and is inert even when in contact with biocides.

The seal means preferably comprises an annular lip which is adapted to sit on an annular lip provided on the collar, providing additional sealing points.

The vessel and seal means arrangement may be in sealing engagement with extraction means for extracting liquid from a vessel and dispensing the liquid as a spray.

As described above most of the improvements in the dispensing device described in GB 2 333 129 relate to the liquid containing vessel.

The present invention, however, also provides in a second aspect a spray dispenser assembly comprising

(a) a collapsible liquid impermeable vessel as described in accordance with the first aspect of the invention;

(b) extraction means for extracting liquid from the vessel and dispensing the liquid as a spray; and

(c) seal means arranged in sealing position to substantially seal the vessel to the extraction means and substantially inhibit the ingress of air into the vessel;

the seal means and extraction means being arranged such that the extraction means is operable to dispense liquid from the vessel whilst the seal means is in a sealing position.

The seal means is preferably arranged to receive a dispensing line extending into the interior of the vessel.

The dispensing line (which may, typically be an elongate tube) preferably extends through the seal means being

5 gripped in sealing engagement with a bore or aperture provided through the seal means. Alternatively, the dispensing line may be bonded in the bore or aperture by a sealing adhesive.

The extraction means preferably comprises pressure  
10 means for creating a differential pressure to dispense liquid from the vessel.

The extraction means may comprise pump means (typically actuatable by a trigger pumping mechanism) to dispense liquid from the vessel. The arrangement of the  
15 seal means and differential pressure extraction means ensures that any exhaust air or back pressure does not result in ambient air being drawn into the vessel. This may be achieved by ensuring that any vent or back pressure release of the extraction means/pump trigger arrangement is  
20 positioned externally of the seal means. Because the vessel collapses as liquid is dispensed, little or no back pressure (vacuum) exists in the vessel.

The extraction means preferably further includes a nozzle for ensuring liquid is dispensed as a spray.

It is preferred that the dispenser further comprises support means for supporting the vessel container.

The support means preferably comprises an outer housing or container for the vessel, which outer housing or  
5 container is preferably substantially more rigid than the vessel.

The support means preferably includes an opening or support neck for locating the collar of the vessel. If the vessel has an annular lip this is intended to sit on the  
10 support neck of the support means to locate the vessel in the correct position with regard to the support means.

The support means may include an opening or support neck for locating the extraction means. The opening/neck is preferably arranged to cooperate in sealing engagement with  
15 the vessel.

The support means may comprise a vent permitting the air inside the support means (but externally) of the vessel to exist at ambient atmospheric pressure.

In one embodiment, the support means may comprise a  
20 bottle or the like (such as a plastics bottle), preferably having a neck opening for locating the vessel, and/or the extraction means.

In an alternative embodiment, the support means may comprise a frame structure, preferably having a support  
25 neck for locating the vessel, and/or the extraction means.

In a third embodiment the present invention provides a kit comprising a vessel according to the first aspect of the invention and a bung or stopper for sealing engagement therewith. The kit preferably further comprises extraction  
5 means for extracting liquid from the vessel and dispensing the liquid as a spray, sealing means to sealingly engage the vessel and extraction means, and support means for the vessel.

The kit preferably comprises a vessel according to the  
10 first aspect of the invention, a conventional pump dispenser trigger assembly, a bung adapted for sealing engagement with the vessel and having a bore therein adapted to sealingly engage with a dip tube of the trigger assembly, and a support container.

15 It will be appreciated that the vessel may be provided separate of the support means, trigger assembly and sealing means, each of which may be adapted from the art. The invention is intended to encompass the vessel with or without liquid contained therein.

20 The invention will now be further described in a specific embodiment, by way of example only, and with reference to the accompanying drawings in which:

Fig 1 is a schematic sectional view of an exemplary spray dispenser according to the invention;

Fig 2 a, b show details of the vessel according to a preferred embodiment of the invention; and

Fig 3 is a graph showing a comparison between the leakage shown with the system of GB 2 333 129 A and vessels  
5 according to the present invention.

Referring to Figure 1, there is shown a spray dispenser 1 comprising an outer plastics bottle 2 (shown in part only) having a neck 3 to which can be fitted a screw threaded plastics cap (not shown). A collapsible liquid  
10 impermeable vessel or bag 4 is disposed in the interior of the bottle 2.

The bag 4 comprises flexible plastics material which is inert upon irradiation and contact with biocides. The bag was made by heat welding two or more sheets of such  
15 plastics material to make an elongate cylinder with an open neck end 5 and a curved bottom 7. The seam 6 between the layers of material defines the interior of the bag 4.

An annular collar 8 is provided in the neck 5. Material around the seam 6 at neck 5 is cut away so that  
20 the collar 8 may be welded in the neck 5 without pinching of excess material. The weld 10 is provided completely around the circumference of the collar 8 and is at least 5 mm in width. Further detail of the collar and neck weld are apparent from Fig. 2.

An annular rubber sealing bung 12 is a tight press fit in the collar 8. Preferably the collar 8 has an annular lip 14 on its upper side, as does the bung 12 (indicated by numeral 16). When the bung 12 is in sealing engagement

5 with the collar 8 the lips 14 and 16 meet to provide an additional sealing surface.

Bung 12 is provided with an axial aperture permitting a dip tube (indicated in dashed lines), connecting to a trigger assembly (not shown) to pass into the interior of  
10 the collapsible bag 4. The resilient nature of the bung 12 ensures that an airtight seal is provided between the axial aperture of bung 12 and the dip tube.

Alternatively, or additionally, the dip tube may be thermally bonded to the axial aperture of bung 12, and/or a  
15 sealant material applied.

The trigger assembly used in the dispenser device conforms in general to known prior art differential pressure pump arrangements in which actuation of the trigger causes a pressure differential drawing liquid along  
20 the dip tube and dispensing as a fine spray. The arrangement of the bung 12 and differential pressure extraction pump trigger arrangement ensures that any exhaust air or back pressure does not result in ambient air being drawn into the collapsible container. This is  
25 achieved by ensuring that any vent or back pressure release

of the pump trigger arrangement is positioned externally of the seal means. Because the collapsible bag 4 collapses as liquid is dispensed, little or no back pressure (vacuum) exists in the flexible collapsing bag 4.

5       The plastics bottle 2 is provided with a vent 16 to atmosphere which prevents a partial vacuum being created between the interior walls of bottle 2 and the bag 4 as the bag collapses. Alternatively, the differential pressure created by the pump trigger arrangement may be sufficient  
10   to overcome any partial vacuum created in the interior of the bottle 2, externally of the collapsing bag 4.

Because of the extraction and seal arrangement, the spray dispenser of the present invention enables a manually actuatable differential pressure extraction arrangement  
15   (such as a trigger pump dispenser) to be used for applications requiring avoidance of atmospheric contamination of the sprayed dispenser contents.

Example

The vessel according to the present invention provides  
20   an improved spray dispenser assembly over that described in GB 2 333 129 A. To prove that the vessel of the present invention has less leakage than its predecessor, the following experiment was carried out.

The following dispenser assemblies were simultaneously  
25   tested by filling the vessels with liquid, turning each



support bottle upside down and leaving for 12 hours at room temperature and pressure. Leakage from the bags was measured by determining if any fluid was lost from the bag and also studying the bag and bottles for the presence of

5 liquid.

Dispenser 1 - as described in GB 2 333 129 A

Dispenser 2 - collar arrangement as described in accordance with the present invention, with a single weld between the neck and collar and without the removal of  
10 material from around the seam at the neck prior to welding

Dispenser 3 - collar arrangement as described in accordance with the present invention, with a 5 mm weld between the neck and collar around the full collar circumference and with the removal of material from around  
15 the seam at the neck prior to welding to prevent pinching.

The results are shown in Fig. 3 which shows a considerable reduction in leakage in dispenser 2, to an almost negligible level. No leakage was observed from dispenser 3.

Claims:

1. A collapsible liquid impermeable vessel for use in a spray dispenser assembly,

the vessel having an open end comprising a neck  
5 portion provided with a collar that is more rigid than the vessel;

the collar being adapted to sealingly engage with seal means provided between the extraction means of the spray dispenser assembly and the vessel.

10 2. A vessel according to claim 1, in which the collar is formed separately from the neck and joined thereto around the collar circumference.

3. A vessel according to claim 1, in which the collar is inserted into the neck and welded around the full collar  
15 circumference.

4. A vessel according to claim 1, in which the vessel comprises two sheets of plastics material welded together at their edges to form a substantially cylindrical vessel providing a neck end with an open neck portion disposed at  
20 one end thereof, with a collar disposed therein, and a closed end opposite the neck end.

5. A vessel according to claim 4, in which excess material is removed from around the neck portion prior to welding the collar thereto.

6. A vessel according to claim 1, in which the closed end opposite the neck end is substantially curved.

7. A vessel according to claim 1, in which the neck portion is disposed in the centre of the neck end of the

5 vessel.

8. A vessel according to claim 1, in which the neck portion is offset to one side of the neck end of the vessel and wherein additional strengthening is provided around the neck end of the vessel.

10 9. A vessel according to any preceding claim, in which the collar is annular and is adapted to sealingly engage with annular sealing means.

10. A vessel according to claim 9, in which the collar is substantially tapered so that pushing seal means into the  
15 collar provides a progressively greater seal.

11. A vessel according to claim 9 or claim 10, in which the collar has an annular lip adapted to rest upon the neck of a support means.

12. A vessel according to any preceding claim, in which  
20 the vessel comprises flexible sheet or membrane material.

13. A vessel according to any preceding claim, in which the vessel comprises a flaccid bag or pouch.

14. A vessel according to any preceding claim, in which the vessel is incapable of self-support.

15. A vessel according to any preceding claim, in which the vessel comprises plastics material which is inert, even upon irradiation or contact with biocides or other liquids that it may be used to contain.
- 5 16. A vessel according to any preceding claim, in which the collar comprises plastics material.
17. A vessel according to any one of claims 1 to 16 comprising seal means in sealing engagement with the collar thereof.
- 10 18. A vessel according to claim 17, in which the seal means comprises resiliently flexible material such as rubber or the like.
19. A vessel according to claim 17, in which the seal means comprises a stopper, plug or bung.
- 15 20. A vessel according to claim 17, in which the seal means is sealingly engaged with extraction means for extracting liquid from the vessel and dispersing the liquid as a spray.
21. A spray dispenser assembly comprising
- 20 (a) a collapsible liquid impermeable vessel according to any one of claims 1 to 16;
- (b) extraction means for extracting liquid from the vessel and dispensing the liquid as a spray; and

(c) seal means arranged in sealing position to substantially seal the vessel to the extraction means and substantially inhibit the ingress of air into the vessel; the seal means and extraction means being arranged such

5 that the extraction means is operable to dispense liquid from the vessel whilst the seal means is in a sealing position.

22. A spray dispenser assembly according to claim 21, in which the extraction means includes a dispensing line  
10 extending inside the vessel.

23. A spray dispenser assembly according to claim 22, in which the dispensing line comprises an elongate tube.

24. A spray dispenser assembly according to claim 22 or claim 23, in which the dispensing line extends through the  
15 seal means between the vessel and the extraction means, being gripped in sealing engagement with a bore and aperture provided through the seal means.

25. A spray dispenser assembly according to any preceding claim, in which the extraction means includes pressure  
20 means to create a differential pressure to dispense liquid from the vessel.

26. A spray dispenser assembly according to claim 25, in which the extraction means comprises pump means arranged to dispense liquid as a pumped spray.

27. A spray dispenser assembly according to claim 26, in which the pump means is actuatable by a trigger pumping arrangement.

28. A spray dispenser assembly according to any one of  
5 claims 21 to 27, in which the vessel collapses from an expanded state to an increasingly collapsed state as liquid is extracted from the vessel.

29. A spray dispenser assembly according to any one of  
10 claims 21 to 28 further comprising support means for supporting the vessel.

30. A spray dispenser assembly according to claim 29, in which the support means comprises an outer housing or container for the vessel.

31. A spray dispenser assembly according to claim 30, in  
15 which the support means is substantially more rigid than the vessel.

32. A spray dispenser assembly according to any one of claims 29 to 31, in which the support means includes an opening or support neck for the collar of the vessel.

20 33. A spray dispenser assembly according to claim 32, in which an annular lip on the vessel is arranged to sit about the opening of the support means so as to attach it thereto.

34. A spray dispenser assembly according to any one of claims 29 to 33, in which the support means includes an opening or support neck for locating the extraction means.

35. A spray dispenser assembly according to claim 32

5 or 34, in which the opening/neck is configured to cooperate in sealing engagement with the vessel.

36. A spray dispenser assembly according to any one of claims 29 to 35, in which the support means comprises a bottle or the like.

10 37. A spray dispenser assembly according to any one of claims 29 to 36, in which the support means comprises a frame structure.

38. A spray dispenser assembly according to any one of claims 29 to 37, in which the support means comprises a  
15 vent permitting air inside the support means, but externally of the collapsible container, to exist at ambient atmospheric pressure.

39. A kit comprising a vessel according to any one of claims 1 to 20 and a bung or stopper for sealing engagement  
20 therewith.

40. A kit comprising a vessel according to any one of claims 1 to 20, extraction means for extracting liquid from the vessel and dispensing the liquid as a spray, sealing means to sealingly engage the vessel and extraction means,  
25 and support means for the vessel.

41. A kit according to claim 40 comprising a vessel according to any one of claims 1 to 20, a conventional pump dispenser trigger assembly, a bung adapted for sealing engagement with the vessel and having a bore therein
- 5 adapted to sealingly engage with a dip tube of the trigger assembly, and a support container.



1/3


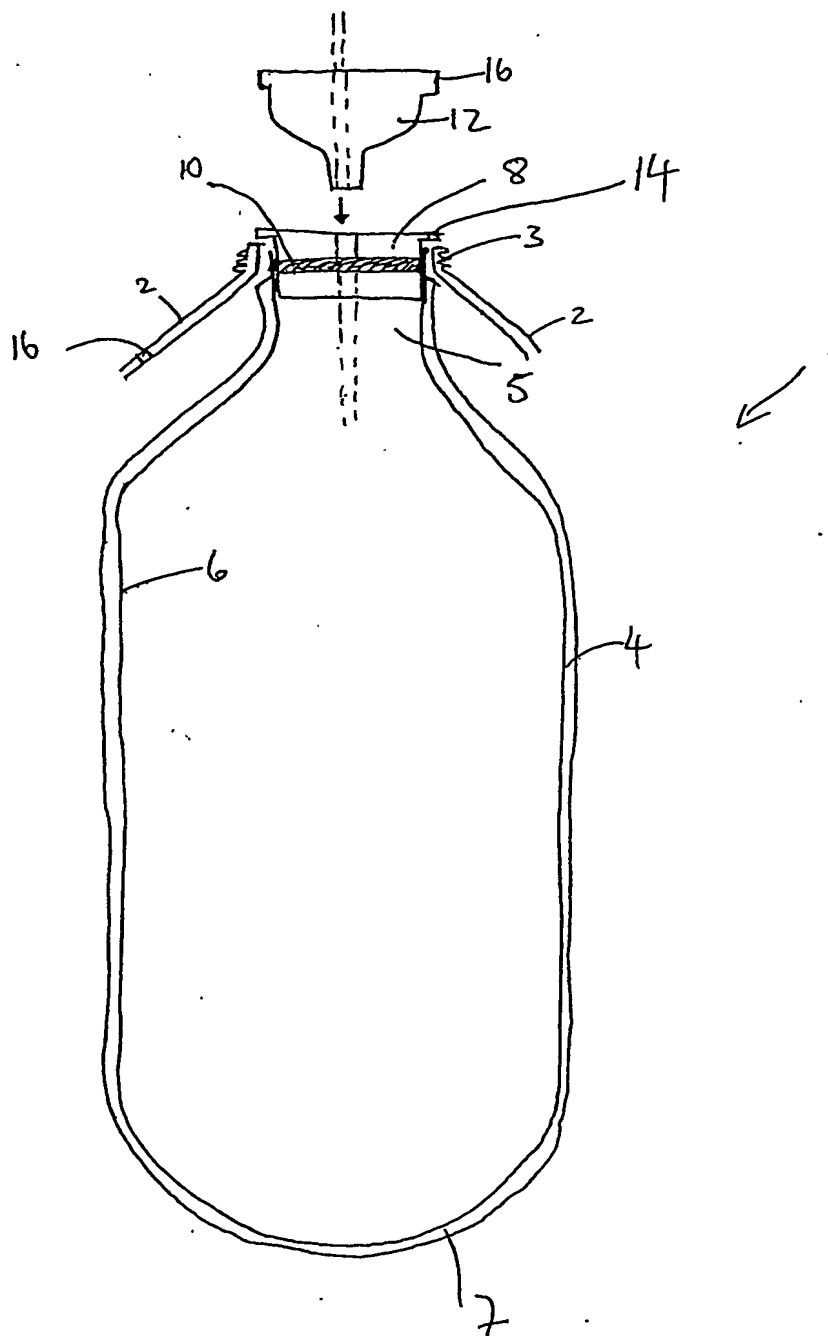


Fig 1

2/3

## Drawing 2 : New Mark 2 Collar System

Side View - Side Welds  
on New Style Collar  
System

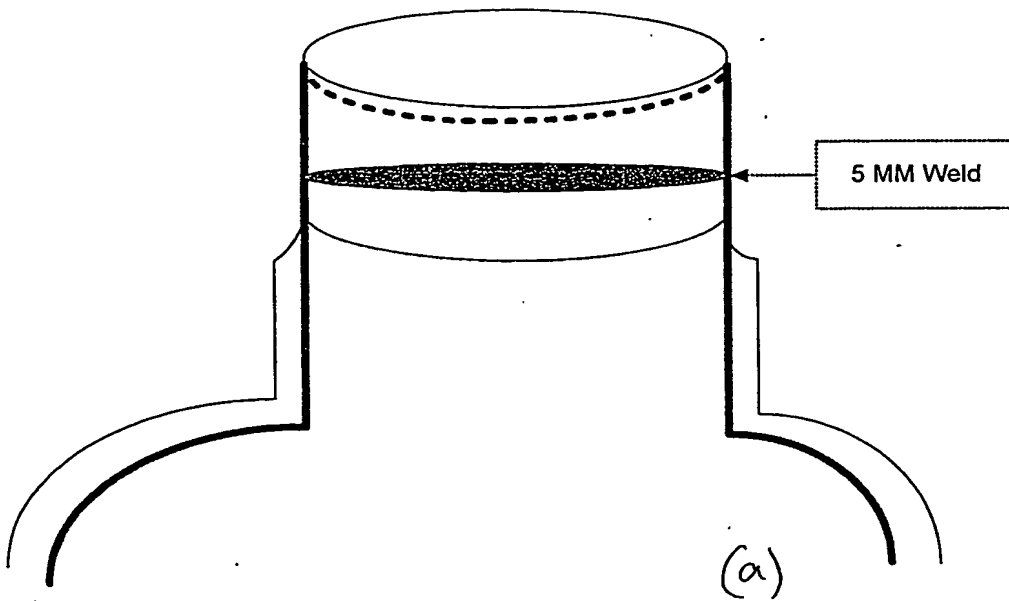

Top View - Full Circular Weld  
around Collar Circumference

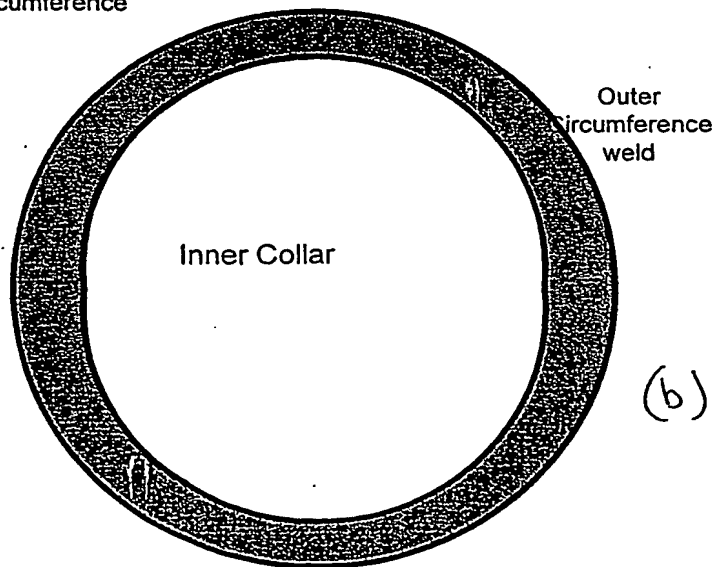


Fig 2

Graph 1 Leaker report - Average % leakage rate per bag type

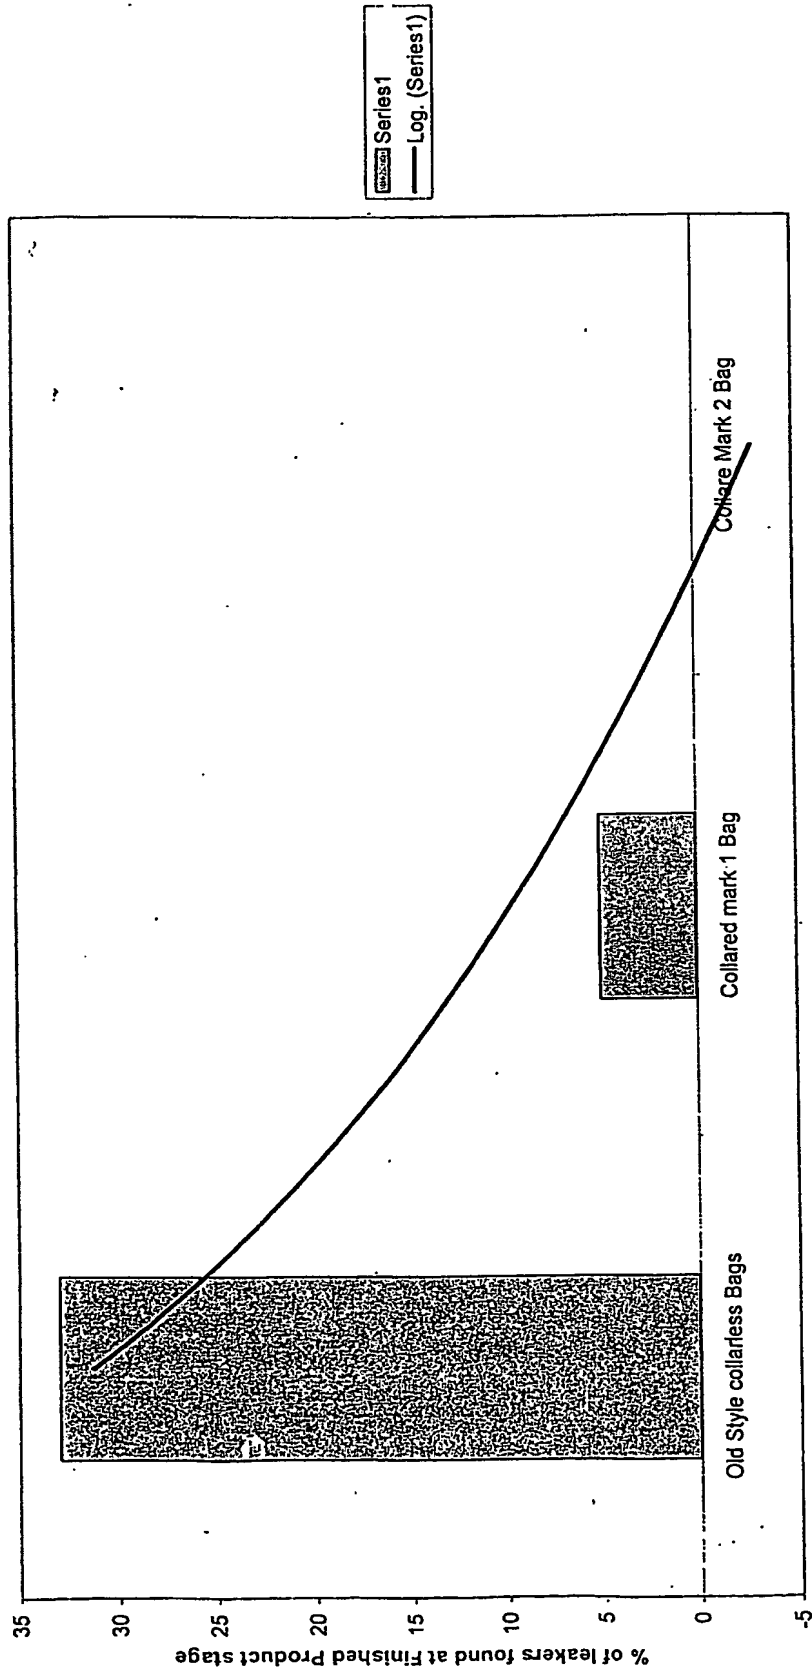


Fig 3

DUPLICATE

Shield Medicare Limited

8683 GB

Spray Dispenser Assembly and  
Vessel Therefor

Abel & Imray,  
Chartered Patent Attorneys,  
20 Red Lion Street,  
London.  
WC1R 4PQ

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**